

The Pass-Thru Series

Waist-High Optical Turnstiles
Bolt Down - Interior & Exterior Application

PT100 • PT100-S • PT100-C • PT100-T

The Pass-Thru™ Series is ideal in demanding situations where you want a more open, stylish look. It is made for years of reliable service in high traffic/volume applications be they indoors or outside. The cabinets are constructed of heavy 14-gauge, 300 series satin stainless steel and feature our Enduro Control Head (with auto indexing and shock suppression technology).



PT100-C (coin)



PT100-T (ticket box)

PT100-S (scanner)
Not shown

8641 S. Warhawk Rd. Conifer, CO 80433
(303) 647-1569 x101 (303) 679-8949 fax
Patrick.McAllister@TURNSTILES.us

The Pass-Thru Series

Waist-High Optical Turnstiles
Bolt Down - Interior & Exterior Application

PT100 • PT100-S • PT100-C • PT100-T

Applications:

This series is made for years of reliable service in either indoor or outdoor high traffic / volume environments where you seek a more open, stylish look.

Product Features:

Materials and Finishes:

Units are finished in your choice of:

- Our signature 304 stainless steel/ No. 4 satin finish

Design & Construction:

- Designed for secure & reliable operation with aesthetics in mind
- Cabinet inner and outer shells and cover are constructed of (14 gauge) 304 stainless steel/ No. 4 satin finish
- Arms constructed of 1-5/16" (33mm) diameter, (12 gauge) stainless
- Hub 4-1/2" (114mm) o.d. also made from stainless
- Minimal exposed hardware

Measures:

Height: 38" (965 mm)

Width: 48.25" (1226mm)

Depth: 10.25" (260mm)

Controller & Access Control Operation:


- Self-centering control head with adjustable hydraulic shock suppression
- Hardened tool steel locking bars, cam and roller assemblies
- Permanently lubricated bearings
- All units are available in clockwise, counter-clockwise or bi-directional passage
- Key-lock Feature - Control direction of travel manually by key (to lock /unlock), or may be used to override electronic controls

Options:

- Electronic lock modules include heavy-duty 24 vdc pull-type industrial solenoids:
- Available in each separate direction: fail-safe (open on power failure) or fail-lock (lock on power failure) modes
- Interfacing to card readers, computer attendance systems, coin and token acceptors, push buttons and wireless remote controls
- Electronic 6 digit re-settable counter with LCD display and ten-year lithium battery
- Additional options available on request

Our matching ADA gate (model FP500-ADA with optional motorization) is available for the PassThru Series.

The Pass-Thru is also available as an Optical model (PTO100).

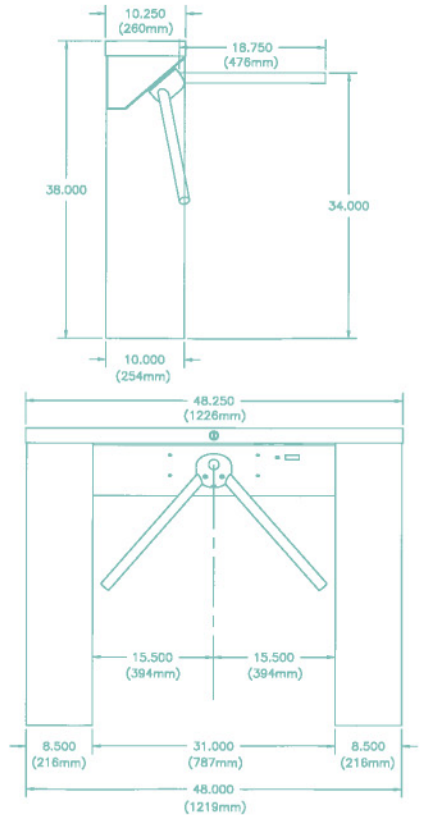

Electrical Specifications:

Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276
Hot rolled steel:
AISI C-1020, AISI C-1018
Hot dipped galvanizing:
ASTM A-143, ASTM A-153-80
Stainless steel fasteners:
ASTM A-320
American Welding Society (AWS)
Standard D 1.1

Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

ENDURO™ Electronic Control Head

EA Controlled Traffic flow both directions

EB Controlled Traffic flow one direction, uncontrolled opposite direction

EC Controlled Traffic flow one direction, no traffic flow opposite direction

ENDURO™ Manual Control Head

MD Uncontrolled traffic flow one direction, no traffic flow opposite direction

MF Uncontrolled traffic flow both directions

MG Key controlled each direction

8641 S. Warhawk Rd. Conifer, CO 80433

(303) 647-1569 x101 (303) 679-8949 fax

Patrick.McAllister@TURNSTILES.us